



# Edgecombe Hall

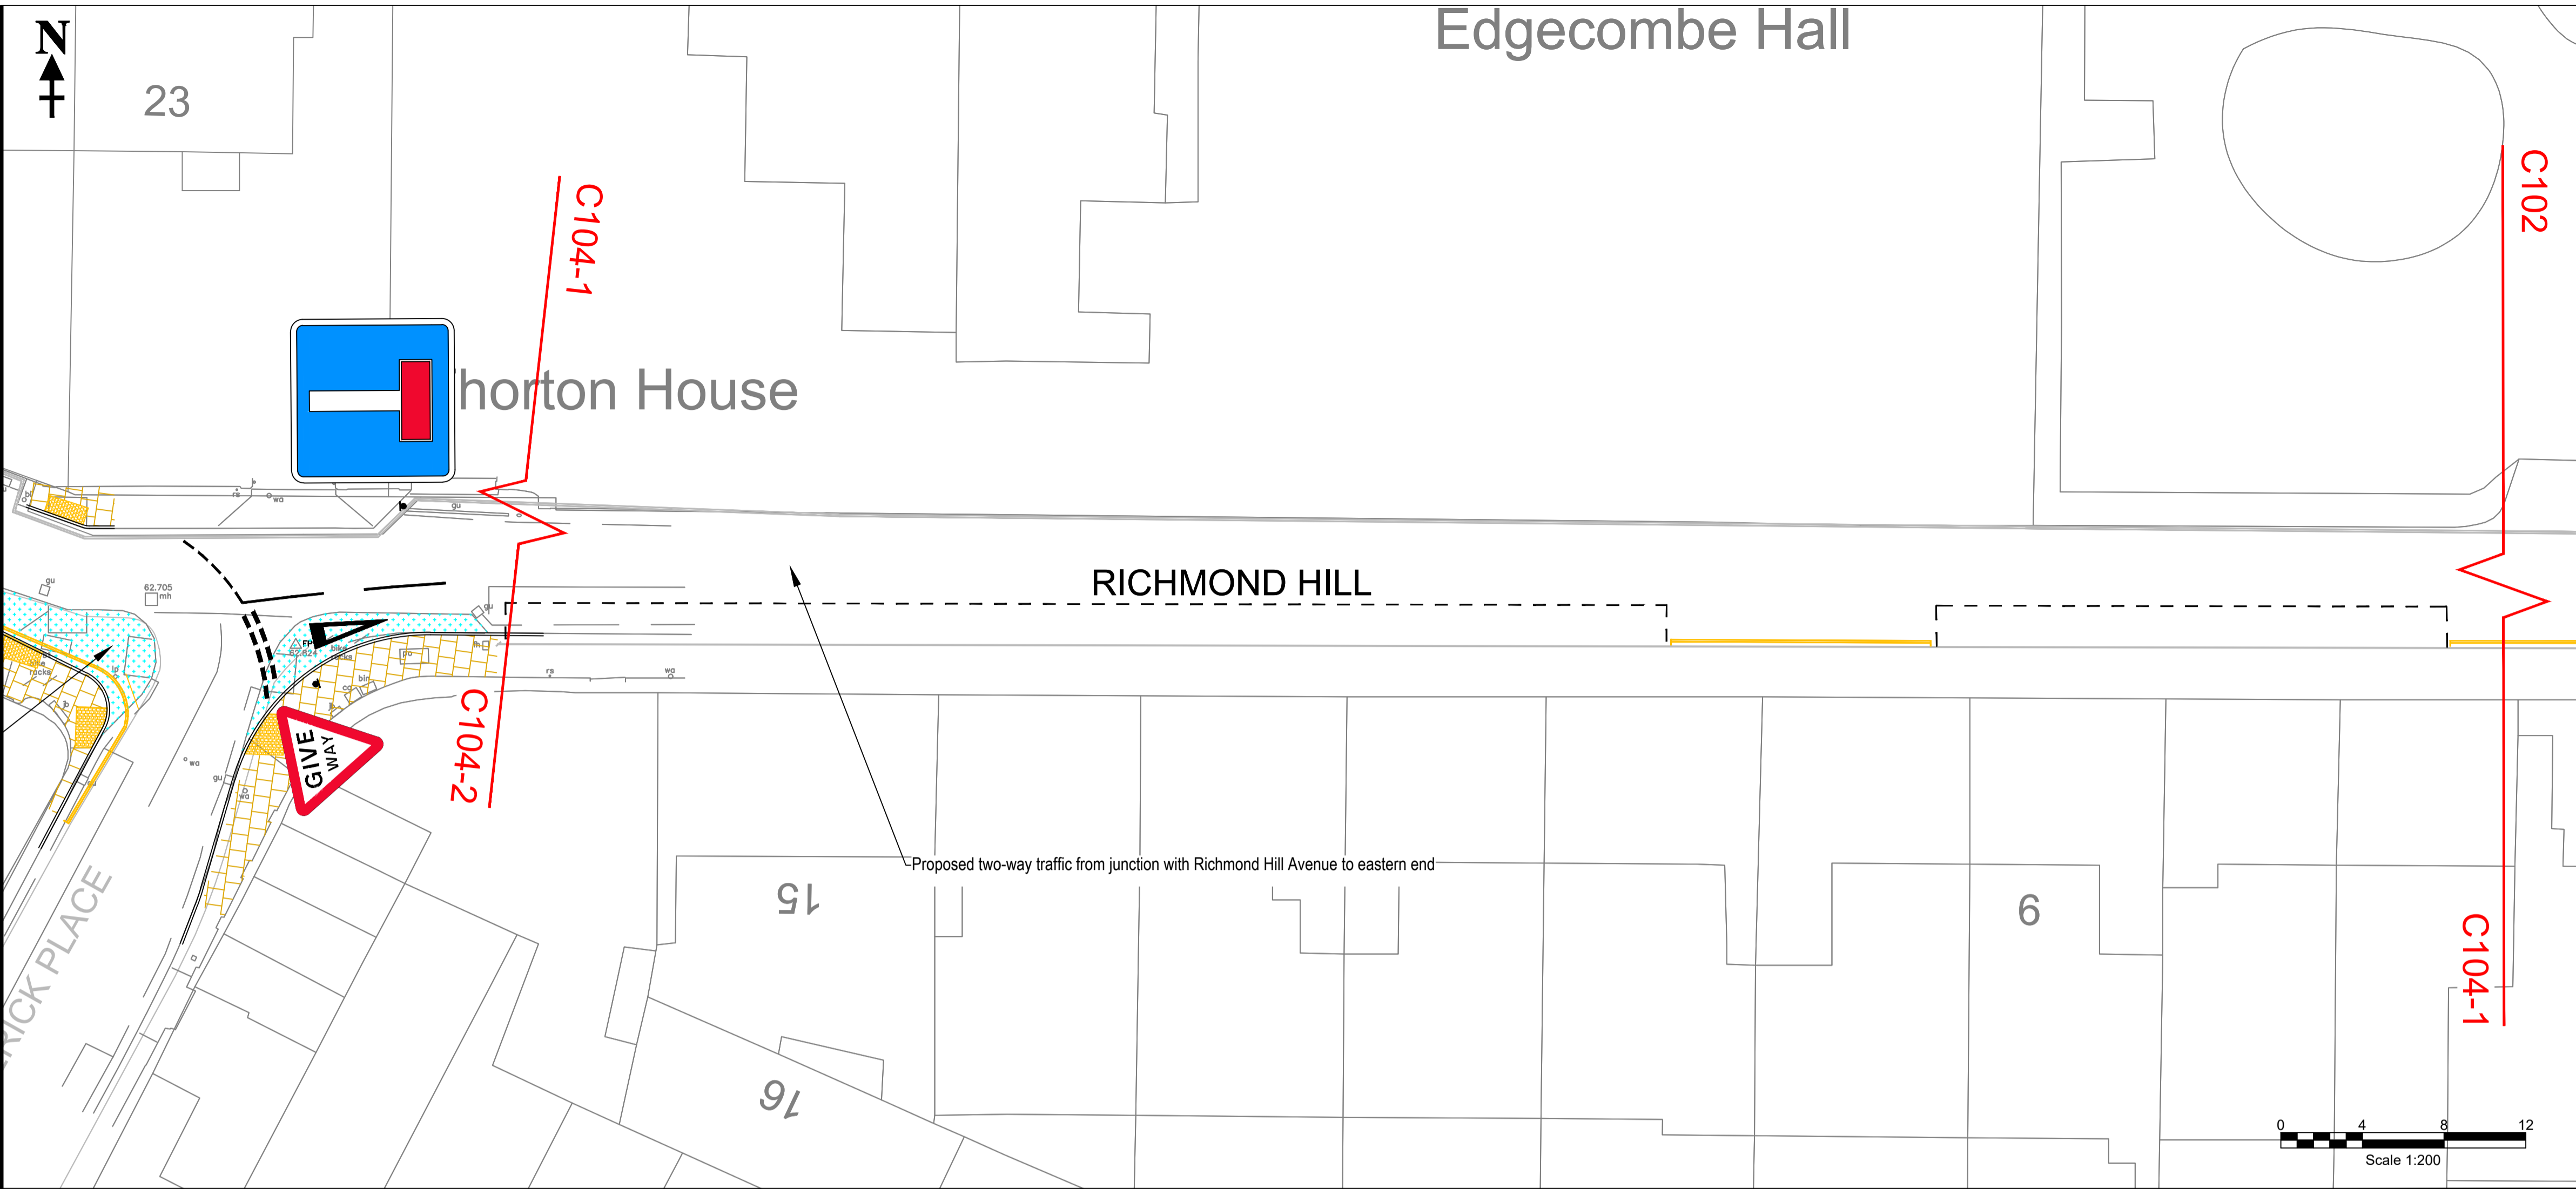

- Flexible carriageway construction as Standard Detail SD0700-001, Major Road
- Surface and binder course as per SD0700-001 to be laid over existing concrete base with stress absorbing layer to existing levels
- Carraigeway to be resurfaced with 45mm surface course to SD0700-001
- Raised table (straight ramp) as Standard Detail SD0700-019
- Reinforced Concrete pad Grade PAV2 32/40 in bus stop carriageway to SD0700-002 and SD0700-027
- New sign post and face to be installed as per SD1200-001, 002, 003, 004, 005
- Sign face only to be installed on existing post
- Charles Endirect BDP80 Feeder pillar supplied and installed by BCC Electrical Contractor
- Traffic Signal Controller Base (supplied by BCC Traffic Signals contractor) to be installed as Standard Detail SD06-008-B
- Signal Pole Base Entry Socket (NAL Socket) as Standard Detail SD006-007-B
- Lay new white road markings
- Lay new primrose yellow road markings
- Lay new primrose yellow kerb ticks on footway (double or single)
- High friction surfacing as per appendix 7/3 buff / grey / red. See series E24019-C1200 for detail
- Cycle lane segregation bollard at 4m spacing (centre to centre)
- Brickwork Type C Manhole as Standard Detail SD-0500-007
- PCC road gully as Standard Detail SD-0500-001/SD-0500-002
- PCC catchpit to SD-0500-009
- Proposed litter bin
- Type BC Sheffield cycle stand to SD04-012-E

- ### GENERAL ARRANGEMENT KEY
- 20 AC 6 Dense Surface Course, 55 Binder Course AC20 as Standard Detail SD1100-007
  - 20 AC 6 Dense Surface Course, 80 Binder Course AC20 as Standard Detail SD1100-011
  - 200x100x65 natural grey PCC block pavers (herringbone pattern) as per SD1100-007
  - 200x100x80 natural grey PCC block pavers (herringbone pattern) for footway crossovers as per SD1100-011
  - 200x100x65 Andover block paving (herringbone pattern) as per SD1100-007
  - 400x400x65 PCC slabs as Standard Detail SD1100-007
  - Natural Pennant stone slab paving with flamed finish as per SD1100-008
  - Re-lay previously set aside pennant stone paving as Standard Detail SD1100-008
  - 80mm Pennant stone paving on 150mm ST4 concrete sub base as per SD1100-010
  - 200x100x63 Pennant stone block pavers with bedding/sub base as per SD1100-008
  - 200x100x100 Pennant Sets as per SD1100-008
  - Landscape feature as approved by the engineer - see series E24019-C3000 for detail
  - Tanked rain garden with low level planting - see xxx for detail
  - Proposed tree - see series E24019-C3000 for detail
  - Existing tree to remain
  - 200x133x65 PCC Tactile block paving (buff at uncontrolled, red at controlled crossings) as Standard Detail SD1100-015 / 016 / 017
  - 400x400x65 Tactile slab paving as per SD1100-018- grey ribbed cycleway paving / buff hazard paving
  - Bus stop kerbs and safe haven to SD1100-028 & 029

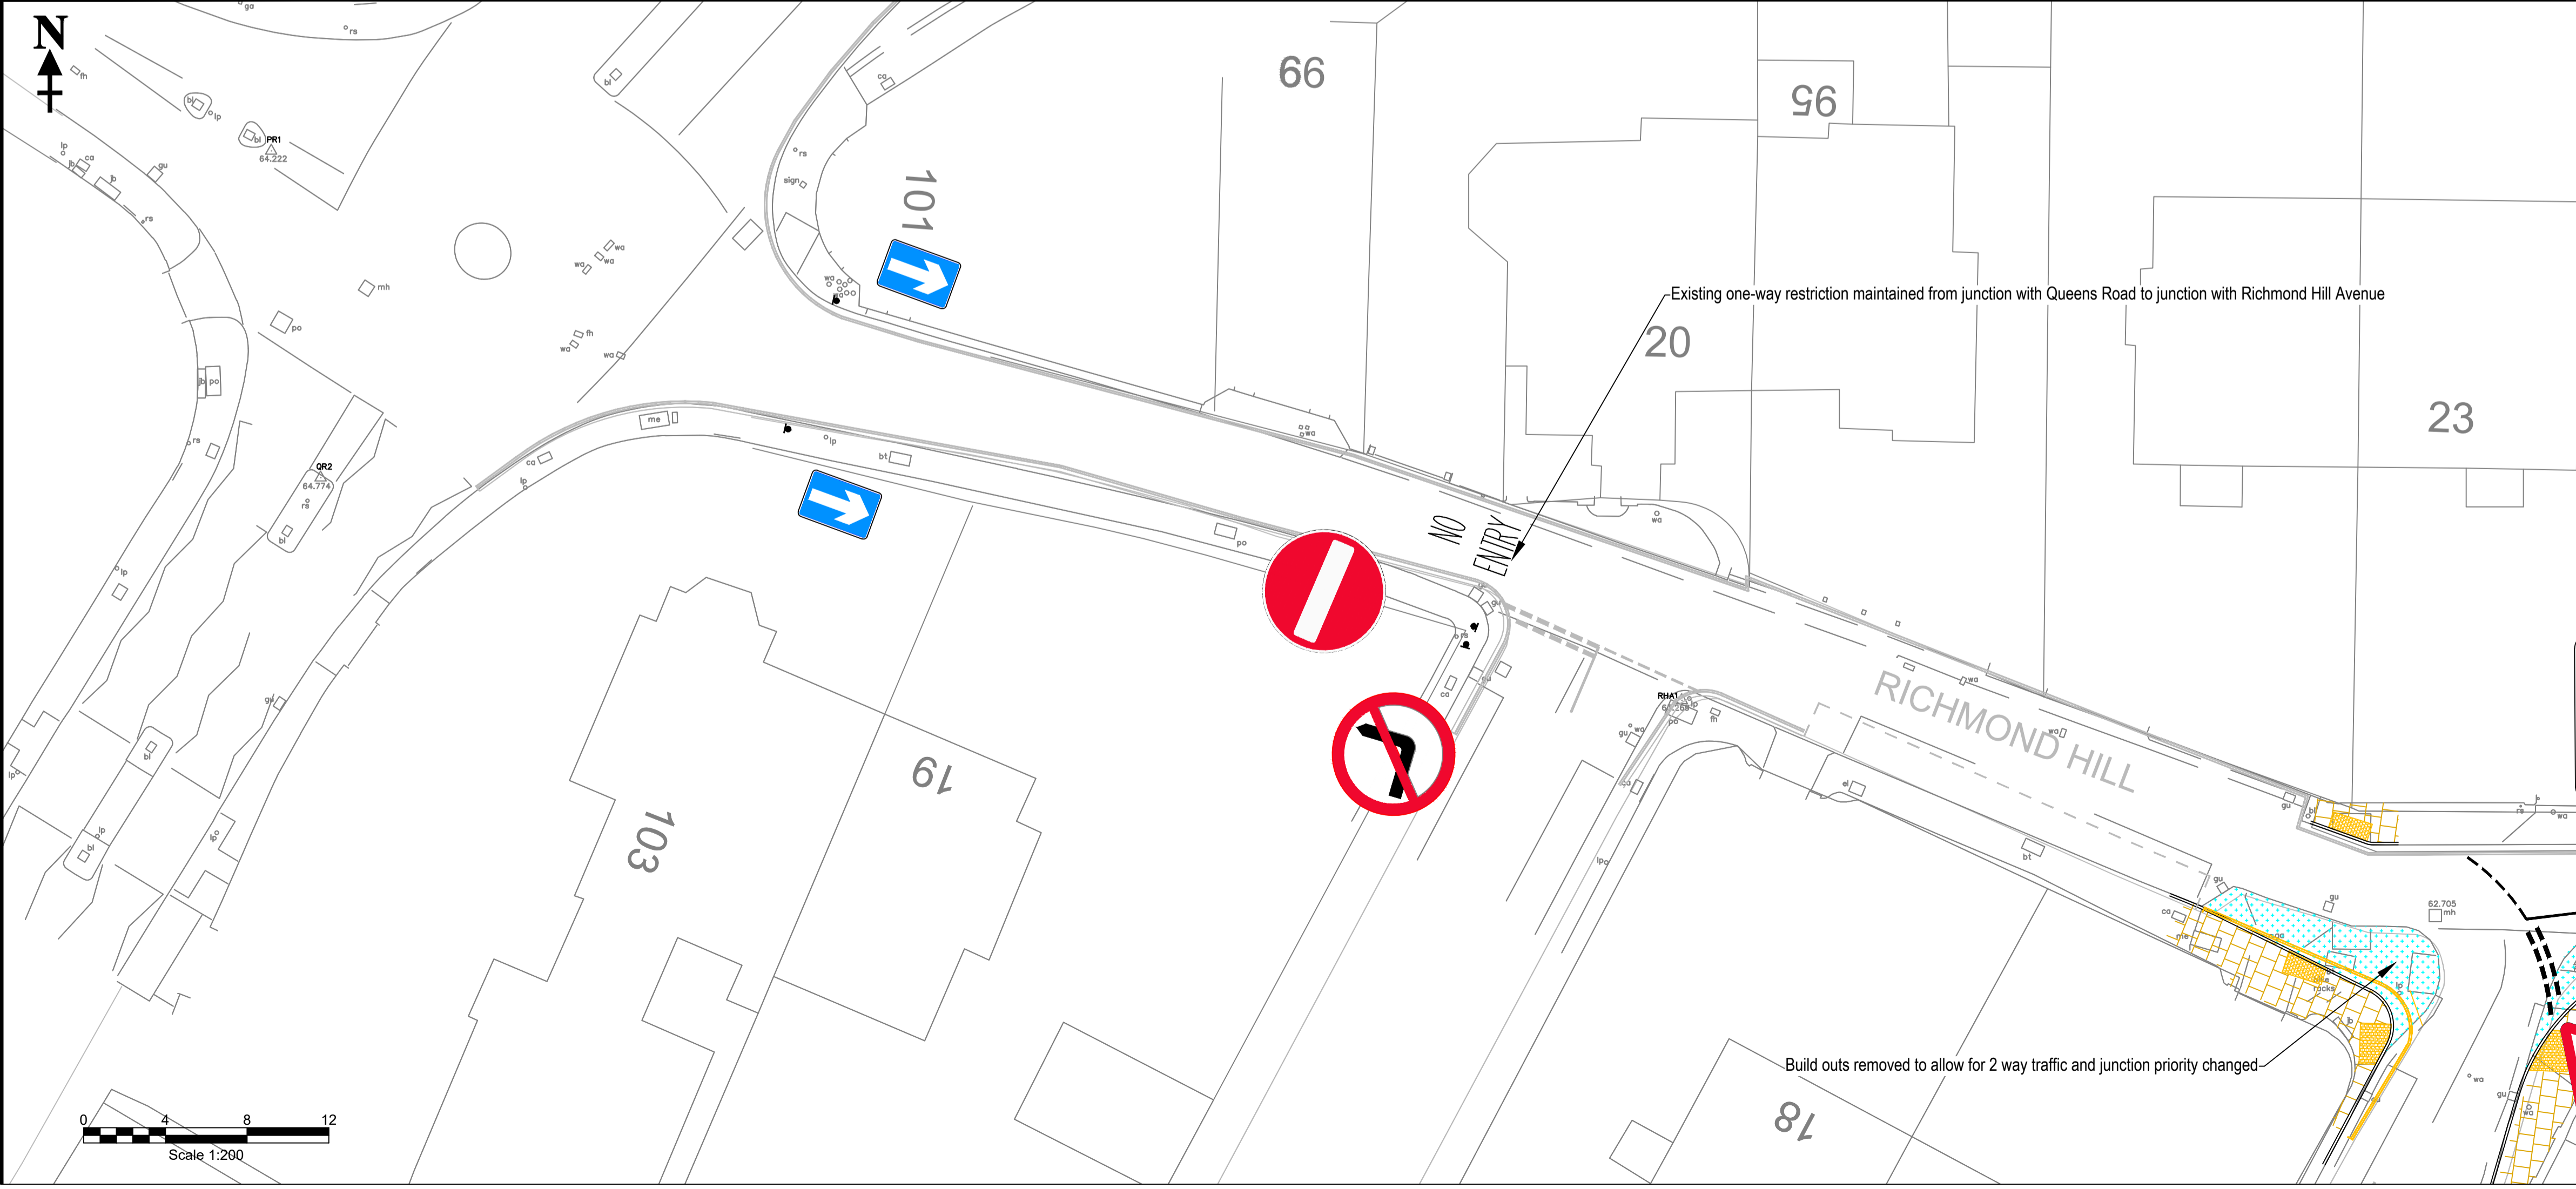

- New sign post and face to be installed as per SD1200-001, 002, 003, 004, 005
- Sign face only to be installed on existing post
- Charles Endirect BDP80 Feeder pillar supplied and installed by BCC Electrical Contractor
- Traffic Signal Controller Base (supplied by BCC Traffic Signals contractor) to be installed as Standard Detail SD06-008-B
- Signal Pole Base Entry Socket (NAL Socket) as Standard Detail SD006-007-B
- Lay new white road markings
- Lay new primrose yellow road markings
- Lay new primrose yellow kerb ticks on footway (double or single)
- High friction surfacing as per appendix 7/3 buff / grey / red. See series E24019-C1200 for detail
- Cycle lane segregation bollard at 4m spacing (centre to centre)
- Brickwork Type C Manhole as Standard Detail SD-0500-007
- PCC road gully as Standard Detail SD-0500-001/SD-0500-002
- PCC catchpit to SD-0500-009
- Proposed litter bin
- Type BC Sheffield cycle stand to SD04-012-E

## TRAFFIC & HIGHWAYS MAINTENANCE

### ENGINEERING & DESIGN

PO Box 3399, Bristol City Council, Bristol BS1 9NE

(C) Crown Copyright and database rights 2024 Ordnance Survey AC0000807971

Rev.	Date	Description	By
A	13/02/2025	QA4 issue	DB

Project  
**A37-A4018 Strategic Corridor Works Package 3**  
**Queens Rd - Triangle - Park St**

Title  
**General Arrangement 04 Richmond Hill**

Client  
**Local and Sustainable Transport Management of Place - Growth & Regeneration**

Drawn by <b>DB</b>	Checked by <b>JGM</b>
Date Drawn <b>09/01/2025</b>	Date Issued <b>09/01/2025</b>
Status <b>CONSTRUCTION</b>	Issued by <b>DB</b>

Scale  
**1:200 @ A1**

Project Number <b>E24019</b>	Drawing <b>- C104</b>	Revision <b>- A</b>
---------------------------------	--------------------------	------------------------