

Bespoke purpose made service entrance gate with distinctive archway suitable for high sided vehicles. Colour of Unit is to be black to match existing railings.



Directly in front of Gates and Archway provide and install a 3100mm wide x 10.5 metre tarmac hardstanding for sevice




KBI FLEXI-PAVE HD 1500 Laid by specialist contractors . Flexipave is similar in appearance to Tarmac but is suitable to be laid near to and around Trees.



South West Boundary wall is to be repointed where necessary. Pointing is to be Ribbon pointing as shown on photograph, in addition sections of the stonewall need to be repaired.



Inclined interpretation board suitable for people to read who maybe in a wheel chair. Board is also located on a flexible hardstanding.

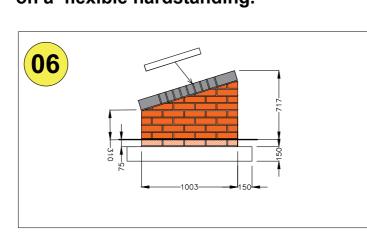

Inclined plinth to house memorial plaque. Plinth will be be constructed of Red and blue engineering brick and will been constructed to protect the the existing stone plaque.




St Johns Memorial to be relocated in new centralised location, as shown on site plan



Replace two number park lights with two new Victorian style low energy Street lights.



Bollards to be repainted.

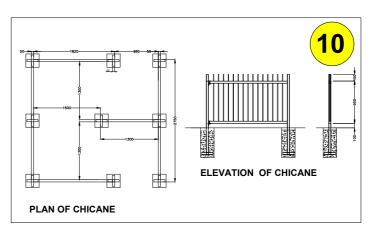

Provide and install small Chicane to main entrance to park opposite Church Road



Provide and install new Tarmac path
1500mm wide and edged with concrete



Existing Path adjacent to the South East boundary is damaged and crazed. It is proposed to remove the top layer of the path with a planer and redress the top surface, as indicated on photos above.



Provide and install new Stainless steel hand rail above existing steps.



Existing Fence to be professionally Repainted, and wall repointed and repaired as necessary.

